



ROLLING STEEL

Product Guide & Specifications Manual

THE DOOR TO QUALITY.



CONTENTS

for Commercial Rolling Steel Doors

2. COMPONENTS & CONSTRUCTION

3. 6000 SERVICE & INSULATED DOORS

5. 6241 24-GAUGE SERVICE DOOR

7. 7000 GUARDIAN™ FIRE DOORS

9. 7500 GUARDIAN™ FIRE SHUTTER

11. 6500 COUNTER SHUTTER

13. MOTOR OPERATORS

14. FINISH OPTIONS



C.H.I. Overhead Doors manufactures rolling steel doors and shutters to exceptional standards of quality. Our promise is to deliver an affordable, owner-friendly product that is reliable, architecturally pleasing and simple to maintain. C.H.I. rolling steel products

are engineered to provide many years of durability and trouble-free operation. Therefore, we proudly offer the longest and most comprehensive warranties in the business.

SERIES 6000 SERVICE DOORS

The Series 6000 rolling service door line bonds uncompromising value with design principles firmly rooted in the industrial arena. Manufactured to stringent engineering and code standards, the Series 6000 line is an industrial product built without shortcuts to provide a high degree of confidence for the specifier and end user.

Available in flat, curved and insulated slat profiles, the Series 6000 line is available in a finish paint coat standard that offers hot-dipped galvanized slats in solid gray, or in a tan or gray exterior with a white interior curtain and hood; colors may be reversed if desired. Chain hoist operation, structural steel guides, 20,000 cycle springs and a five-year warranty are standard features of the Series 6000.

MODEL 6241 SERVICE DOORS

Conceived and designed as a moderately priced dock and material handling solution, the Model 6241 Service Door features full-sized 24-gauge slats and incorporates structural steel guides, full-sized headplates, structural hood, self-aligning drive bearings and Quick Release guides. The commercial design features of the Model 6241 accrue into a true feature-packed, value-added package.

SERIES 7000 FIRE DOORS

The Guardian™ Fire Door is engineered to meet ever-increasing demands of property owners and insurance underwriters in a simple to test and reset fire protection product.

Utilizing standard chain hoist operation, the Guardian Fire Door features a reliable, safe, trouble-free procedure for frequent drop testing with a U.L. label rated from 3/4-hour to 4-hour protection. Manual push-up operation, Fail-Safe and automatic reset motor operation models are optional to the Guardian standard.

SERIES 7500 FIRE SHUTTER

U.L. labeled fire shutter engineered for installation to approved sheetrock, steel, and masonry construction. The Series 7500 Guardian™ fire counter shutter utilizes space-saving design with performance-proven engineering features for maximum eye appeal and fire protection.

SERIES 6500 COUNTER SHUTTER

The quest for aesthetic appeal, security and architectural integrity has produced a counter shutter designed to please the most discriminating buyer. Thoughtful design features such as hidden fasteners and invisible shadow lines have set the bar to a higher level.

Important details, such as integral lift rails for full-width access, fine brush guide runners for smooth, quiet operation, simplified lock mechanisms for effortless security and dual-bottom astragals for a soft touch down to the counter top, combine to yield a shutter with unparalleled good manners. End users, specifiers and installers recognize the 6500 Series as state-of-the-art in design, yet appreciate the simplicity and practicality that defines the product.



COMPONENTS & CONSTRUCTION

Commercial Rolling Steel Doors


Helically wound torsion springs with machined castings for precise tolerances




Pre-finished half hexagon hood for rigidity and aesthetics



Galvanized slats with tan or gray exterior finish coat

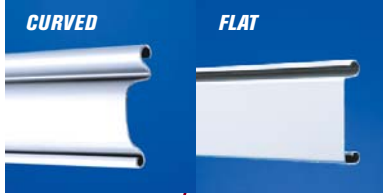

Three-angle structural steel guides prime painted standard or hot-dipped galvanized optional



Plated steel slide locks



Galvanized or prime painted bottom bar angles with adjustable bottom astragal




ENDLOCKS

WINDLOCKS


Malleable, zinc-plated cast iron endlocks and windlocks

SLAT DATA


Hot-dipped galvanized slats available in pre-finished colors or powder-coat.



FLAT SLAT*



CURVED SLAT



INSULATED*

*Vision Lites available for Flat or Insulated Slat doors.

SERIES 6000

Service & Insulated Doors



Cross-section of an insulated slat.



CLASSIC ENGINEERING

C.H.I. Rolling Service Doors are computer-engineered with time-proven principles and designs. The result is a well-tuned, high-performance coiling door.

MAXIMUM VALUE


At C.H.I. we understand that the architect, building owner, installer and service technician each seeks value with absolute reliability. The Series 6000 simplifies the process of selection by integrating the highest design principles into standard features. Simply stated, Series 6000 Service Doors are manufactured to meet your highest expectations of quality, fit and function with no excuses.

DETAILS COUNT

Series 6000 Service Doors are available with curved or flat slat service curtains as well as fully weather-sealed and insulated curtains. A standard white back and hood provide a bright, light-reflecting interior surface. Guides feature a medium black primer coat that matches well with standard paint colors, as well as many powder-coat choices. Curtains are offered in solid gray, gray and white or tan and white paint finishes.

INDUSTRIAL HERITAGE

Structural steel angles are used to fabricate guides for maximum strength and durability. Curtain gauge selection may be made from 22, 20 and 18-gauge galvanized, high-tensile steel. Precision, self-aligning ball bearings support both tension and drive components. The entire spring assembly is designed for simple field removal and inspection. Hoods are formed in a half-hexagonal shape for structural rigidity and aesthetic appeal. Chain hoist operation is a standard feature, and motor operation is available with a full array of safety and activation options.

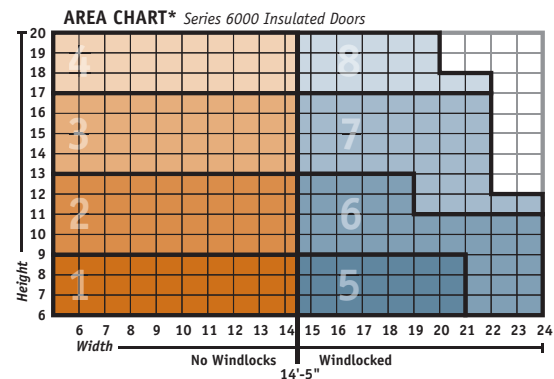

zone	H	B	T	D	X	Y	Z
1	15"	16"	6"	8-1/2"	3-7/8"	4-3/8"	6-1/2"
2	17"	18"	6"	8-1/2"	5"	4-3/8"	6-1/2"
3	19"	20"	6"	8-1/2"	5"	4-3/8"	6-1/2"
4	21"	22"	6"	8-1/2"	5"	4-3/8"	6-1/2"
5	17"	18"	6-1/2"	9-1/2"	6"	4-3/4"	7-1/2"
6	19"	20"	6-1/2"	9-1/2"	6"	4-3/4"	7-1/2"
7	21"	22"	6-1/2"	9-1/2"	6"	4-3/4"	7-1/2"
8	23"	24"	6-1/2"	9-1/2"	6"	4-3/4"	7-1/2"

Consult factory if headroom is critical or for sizes not listed.

Note: For downloadable specifications, please visit our website at www.chiohd.com

SPECIFICATIONS

PART 1 - GENERAL

1.01 WORK INCLUDED: Rolling service doors to be C.H.I. Service Series 6000, flat or curved slat.

1.02 RELATED SECTIONS:

- a. Section 04200 Concrete Block
- b. Section 05500 Metal Fabrications
- c. Section 06100 Wall Construction
- d. Section 08300 Access Doors
- e. Section 09900 Painting
- f. Section 16000 Electrical

1.03 SUBMITTALS:

- a. Furnish all submittals according to guidelines of Section 01300 Submittal Procedures.
- b. Shop Drawings: Furnish shop drawings for architectural approval including elevations and details showing dimensions, finishes, profiles and sections for each door.
- c. Product Literature: Submit manufacturer's brochures and literature describing product to be used.
- d. Provide manufacturer's installation instructions.

1.04 DELIVERY, STORAGE AND HANDLING:

- a. Refer to Section 01660 Material Storage and Handling Requirements.
- b. Deliver and store all materials in manufacturer provided packaging and protect from damage in a safe and dry location.

1.05 WINDLOAD:

- a. Provide doors designed to withstand 20 pounds per square foot of windload.
- b. Limit slat deflection to an amount that prevents curtain from buckling or being blown out of guides.

1.06 WARRANTY: Provide manufacturer's standard five-year warranty from date of plant shipment against defects in materials and workmanship.

PART 2 - PRODUCTS

2.01 GENERAL: Items and components described in the following paragraphs reflect current products manufactured by C.H.I. Overhead Doors, Inc, P.O. Box 260, Arthur, Illinois, 61911, and may be changed without notice by the manufacturer without penalty or liability.

2.02 CURTAIN: Interlocking curtain slats roll-formed from 22, 20 or 18-gauge steel. Insulated curtain slats contain EPS insulation and 24-gauge steel backers. Lateral slat movement and curtain wear controlled by galvanized, malleable cast iron endlocks fastened to every other slat. Windlocks added as dictated by door size and windload. Flat Slats (FS): cover 2-1/2 inches high by 3/4 inch deep. Curved Slats (CS): cover 2-5/8 inches high by 7/8 inch deep. Insulated Slats (IS): cover 2-1/2 inches high by 13/16 inch deep.

2.03 BOTTOM BAR: Fabricated from two steel angles bolted back-to-back, with adjustable tubular bottom astragal.

2.04 GUIDES: Fabricated from three minimum 3/16 inch structural steel angles, bolted together to form guide channel.

2.05 HEADPLATES: Headplates for mounting the curtain, hood, and barrel assemblies fabricated from minimum 1/4 inch steel plate. Drive side of barrel to be provided with precision, greaseable, sealed ball bearings in cast iron housing.

2.06 BARREL: Barrel fabricated from minimum 4-1/2 inch O.D. steel pipe. Deflection under full load not to exceed 0.03 inches per foot of span. Barrel provided with threaded rings or lugs welded to the barrel assembly for curtain attachment.

2.07 SPRINGS: Spring, (tension) assembly supported within barrel by precision ball bearings. Curtain weight counterbalanced by oil-tempered, helically wound torsion springs, grease packed and mounted to steel torsion shaft with cast spring plugs. Spring assembly designed for 20,000 cycle life standard. (Higher cycles optional.)

2.08 HOOD: Hood fabricated from minimum 24-gauge steel sheet, shaped to fit within headplates. Intermediate hood support(s) furnished as required.

2.09 LOCKING: Manual push-up doors furnished with interior plated steel slide bolt locks with padlock provisions. Chain hoist operated doors furnished with chain keeper suitable for padlocking.

2.10 OPERATION: Manual push up, chain hoist, (standard), or motor operation.

2.11 FINISHES: Curtain slats and hood hot-dipped galvanized, per ASTM A-653, G-90, with baked epoxy primer and polyester finish coat in solid gray, gray and white or tan and white. Guides and headplates shop painted black. Bottom bars to be shop painted or galvanized. Hot-dipped galvanized guides and bottom bars optional. Powder-coating is optional.

PART 3 - EXECUTION

3.01 EXAMINATION:



- a. Examine site and notify architect of non-specified conditions or construction.
- b. Advise procedures and corrections necessary to accommodate installation.

3.02 INSTALLATION: C.H.I. rolling steel doors shall be installed and adjusted according to C.H.I. assembly instructions by trained door systems technicians.

3.03 CLEANING AND PRESENTATION:

- a. Clean all finished surfaces after installation for a factory original appearance.
- b. Replace any damaged components before final inspection.
- c. Remove all packaging and debris from installation area at the completion of installation.
- d. Present operation and maintenance instructions to owner after demonstrating proper care and operation of door.





HEADER CLEARANCES & DIMENSIONS (INCHES)

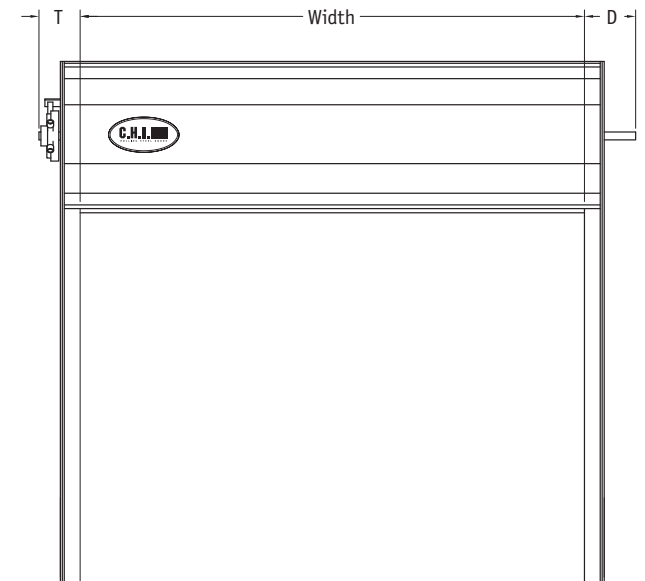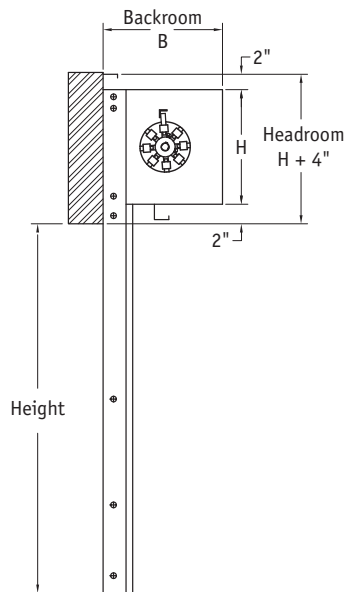

DETAILS

CLEARANCES & DIMENSIONS

1. Steel
2. Wood or Masonry
3. Wood, Masonry or Steel

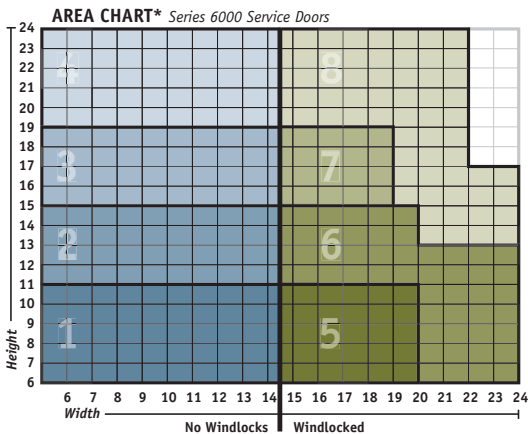

zone	H	B	T	D	X	Y	Z
1	15"	16"	6"	8-1/2"	3-7/8"	4-3/8"	6-1/2"
2	17"	18"	6"	8-1/2"	5"	4-3/8"	6-1/2"
3	19"	20"	6"	8-1/2"	5"	4-3/8"	6-1/2"
4	21"	22"	6"	8-1/2"	5"	4-3/8"	6-1/2"
5	17"	18"	6-1/2"	9-1/2"	6"	4-3/4"	7-1/2"
6	19"	20"	6-1/2"	9-1/2"	6"	4-3/4"	7-1/2"
7	21"	22"	6-1/2"	9-1/2"	6"	4-3/4"	7-1/2"
8	23"	24"	6-1/2"	9-1/2"	6"	4-3/4"	7-1/2"

Consult factory if headroom is critical or for sizes not listed.

*When using Area Charts, if size falls on a zone division line, go up or right to the next zone.

MODEL 6241 24-Gauge Service Door



Loading dock and material handling locations demand a street-tough rolling service door that represents an exceptional value at a moderate price.

The Model 6241 utilizes aggressive, yet innovative design approaches to deliver sensible, high-performance features that meet these demands.

STANDARD FEATURES

- Standard sized commercial 2-1/2" interlocking flat slats in 24-gauge steel are hot-dipped galvanized, pre-painted in gray and white, and maintain high security with lighter weight and reduced cost.
- Cast iron, malleable endlocks exceed industry expectations for performance and wear in a light industrial door.
- Structural steel three-angle guides utilize integral bell mouths, curtain stops and Quick-Release guide angles for higher security, maximum durability, faster installation times and no-hassle, simplified repair requirements.
- Repairs are quickly and inexpensively expedited with common, readily available components.
- Full-sized headplates provide a solid platform for chain hoist or motor operation.
- Half-hexagonal formed hoods, pre-finished in white, deliver superior structural rigidity and high aesthetic appeal.
- Heavy-duty, 3.5:1 chain hoists install quickly and provide a fine balance between operator effort and cycling speed.
- Security is enhanced with plated slide locks for manual operation, or a chain keeper suitable for padlocking for chain hoist operation.
- Value is enhanced by building real time performance expectations into time proven, reduced cost designs.

SPECIFICATIONS

PART 1 - GENERAL

1.01 WORK INCLUDED: Rolling service doors to be C.H.I. Model 6241, flat slat.

1.02 RELATED SECTIONS:

- a. Section 04200 Concrete Block
- b. Section 05500 Metal Fabrications
- c. Section 06100 Wall Construction
- d. Section 08300 Access Doors
- e. Section 09900 Painting
- f. Section 16000 Electrical

1.03 SUBMITTALS:

- a. Furnish all submittals according to guidelines of Division 1.
- b. Shop Drawings: Furnish shop drawings for architectural approval including elevations and details showing dimensions, finishes, profiles and sections for each door.
- c. Product Literature: Submit manufacturer's brochures and literature describing product to be used.
- d. Provide manufacturer's installation instructions.

1.04 DELIVERY, STORAGE AND HANDLING:

- a. Refer to Division 1 Material Storage and Handling Requirements.
- b. Deliver and store all materials in manufacturer provided packaging and protect from damage in a safe and dry location.

1.05 WINDLOAD:

- a. Provide doors designed to withstand minimum 20 pounds per square foot of windload.

1.06 WARRANTY: Provide manufacturer's standard one-year warranty from date of plant shipment against defects in materials and workmanship.

PART 2 - PRODUCTS

2.01 GENERAL: Items and components described in the following paragraphs reflect current products manufactured by C.H.I. Overhead Doors, Inc, P.O. Box 260, Arthur, Illinois, 61911, and may be changed without notice by the manufacturer without penalty or liability.

2.02 CURTAIN: Standard flat curtain slats, interlocking type, roll-formed 24 gauge steel. Lateral slat movement and curtain wear controlled by galvanized, malleable cast iron endlocks fastened to every other slat. Flat Slats (FS): Cover 2-1/2 inches high by 3/4 inch deep.

2.03 BOTTOM BAR: Fabricated from steel angle. Bottom bar astragal is optional.

2.04 GUIDES: Fabricated from three structural steel angles, bolted together to form a guide channel and mounting angle. Quick Release guide angles include curtain stops and bellmouths integral to guides.

2.05 HEADPLATES: Headplates for mounting curtain, hood, and barrel assemblies fabricated from steel plate. Drive side of the door axle provided with self-aligning precision bearing.

2.06 BARREL ASSEMBLY: Barrel constructed from minimum 4-1/2 inch O.D. steel pipe. Deflection under full load not to exceed 0.03 inches per foot of span. Barrel provided with threaded lugs welded to barrel assembly for curtain attachment.

2.07 SPRINGS: Spring assembly fabricated with precision ball bearings supporting tension shaft assembly. Curtain weight counter-balanced by oil-tempered, helically wound torsion springs, grease packed and mounted on steel torsion shaft. Springs designed to provide 10,000 cycles. (Higher cycles rates available).

2.08 HOOD: Hood fabricated from 24-gauge steel sheet, shaped to fit within headplates.

2.09 LOCKING: Plated slide locks furnished for manual push-up operation. Chain hoist operated doors provided with chain keeper having provision for padlock.

2.10 OPERATION: Manual push up, chain hoist, or motor operation.

2.11 FINISHES: Curtain slats and hood hot-dipped galvanized, per ASTM A-653, G-60, with baked epoxy primer and polyester finish coat in gray and white. Guides and headplate shop painted black. Powder-coating optional. Bottom bars to be shop painted or galvanized.

PART 3 - EXECUTION

3.01 EXAMINATION:



- a. Examine site and notify architect of non-specified conditions or construction.
- b. Advise procedures and corrections necessary to accommodate installation.

3.02 INSTALLATION: C.H.I. rolling steel doors shall be installed and adjusted according to C.H.I. assembly instructions by trained door systems technicians.

3.03 CLEANING AND PRESENTATION:


- a. Clean all finished surfaces after installation for a factory original appearance.
- b. Replace any damaged components before final inspection.
- c. Remove all packaging and debris from installation area at the completion of installation.
- d. Present operation and maintenance instructions to owner after demonstrating proper care and operation of door.

HEADER CLEARANCES & DIMENSIONS (INCHES)

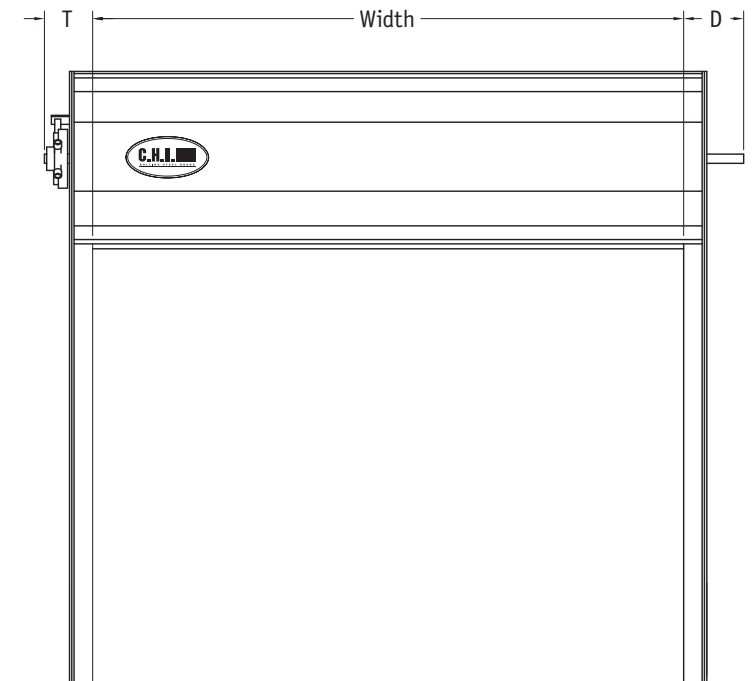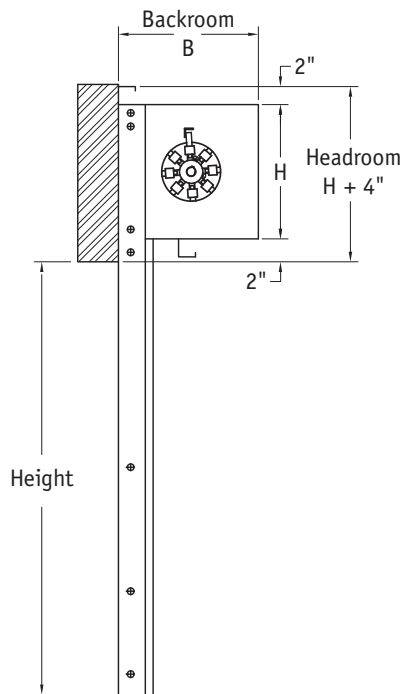


DETAILS CLEARANCES & DIMENSIONS

1. Steel
2. Wood or Masonry

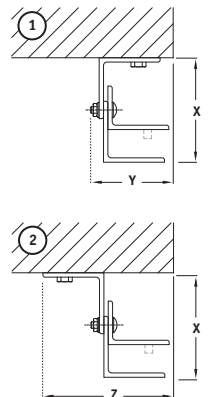

AREA CHART* Model 6241 Service Doors

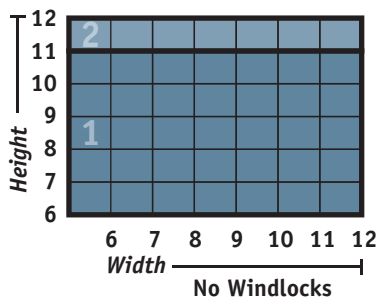

zone	H	B	T	D	X	Y	Z
1	15"	16"	5"	7-1/2"	4"	2-9/16"	4-3/8"
2	17"	18"	5"	7-1/2"	4"	2-9/16"	4-3/8"

Consult factory if headroom is critical or for sizes not listed.

*When using Area Charts, if size falls on a zone division line, go up or right to the next zone.

SERIES 7000

Guardian™ Fire Doors



A MODERN PERSPECTIVE


Guardian™ Fire Doors promote achievable standards for drop test compliance by making the job safe, understandable and simple for everyone. Simple test fire doors are our standard for chain hoist and motor operated doors.

A Feasible Investment: Selected most often for practical drop test compliance and assuring positive crisis response, Guardian™ Fire Doors deliver reliable, predictable and repeatable results.

An Exceptional Choice: The National Fire Protection Association and other model codes recommend frequent drop testing of fire doors to assure a continuous state of operational readiness. C.H.I. strongly promotes these recommendations with the Guardian's™ advanced design features:

- Safe, simple, inexpensive and repeatable drop testing is now made possible in any facility with a flip of a handle.
- No ladders, tools or equipment are required to drop test and reset Guardian™ Simple Test Fire Doors.
- Drop speed is governed by a quiet, centrifugal brake to between 6" to 12" per second.
- Gear reduced chain hoist operation is standard, efficient and economical.
- Manual push-up operation and fail-safe motor operation is optional.
- 165 degree fusible links are provided as standard detection/release devices.
- U.L. Labels are provided from 3/4-hour to 4-hour for labeled and for oversized doors.
- Guides mount to approved masonry, steel and sheetrock construction.
- Upward-expanding guides may be welded to approved steel construction.
- Fail-safe time delayed releases, smoke detectors and audible and visual warning systems are optional.
- Installation time is reduced significantly due to the elimination of complicated release and governor assemblies.
- Curved or flat slat profiles are offered in pre-painted or powder-coated options.

GUARDIAN™ FIRE DOORS CARRY STANDARD LISTING OR OVERSIZE U.L. LABELS.



C.H.I. Listing Label



C.H.I. Oversize Label

SPECIFICATIONS

PART 1 - GENERAL

1.01 WORK INCLUDED: Rolling steel fire doors to be C.H.I. Guardian™ Series 7000, and comply with Underwriter's Laboratories requirements for 4, 3, 1-1/2, and 3/4-hour exterior or interior locations.

1.02 RELATED SECTIONS:

- a. Section 04200 Concrete Block
- b. Section 05500 Metal Fabrications
- c. Section 06100 Wall Construction
- d. Section 08300 Access Doors
- e. Section 09900 Painting
- f. Section 16000 Electrical

1.03 SUBMITTALS:

- a. Furnish all submittals according to guidelines of Division 1 Submittal Procedures.
- b. Shop Drawings: Furnish shop drawings for architectural approval including elevations and details showing dimensions, finishes, profiles and sections for each door.
- c. Product Literature: Submit manufacturer's brochures and literature describing product to be used.
- d. Provide manufacturer's installation instructions.

1.04 DELIVERY, STORAGE AND HANDLING:

- a. Refer to Division 1 Material Storage and Handling Requirements.
- b. Deliver and store all materials in manufacturer provided packaging and protect from damage in a safe and dry location.

1.05 WINDLOAD:

- a. Provide doors designed to withstand minimum 20 pounds per square foot of windload.
- b. Provide higher windload options.
- c. Limit slat deflection to an amount that prevents curtain from buckling or being blown out of guides.

1.06 WARRANTY: Provide manufacturer's standard five-year warranty from date of plant shipment against defects in materials and workmanship. Manufacturer's brochures and literature describing product to be used.

PART 2 - PRODUCTS

2.01 GENERAL: Items and components described in the following paragraphs reflect current products manufactured by C.H.I. Overhead

Doors, Inc, P.O. Box 260, Arthur, Illinois, 61911, and may be changed without notice by the manufacturer without penalty or liability.

2.02 CURTAIN: Interlocking curtain slats of roll-formed 22, 20 or 18-gauge steel. Lateral slat movement and curtain wear controlled by galvanized, malleable cast iron endlocks fastened to every other slat. Windlocks added as dictated by windload requirements. Flat Slats (FS): cover 2-1/2 inches by 3/4 inch deep. Curved Slats (CS): cover 2-5/8 inches by 7/8 inch deep.

2.03 BOTTOM BAR: Bottom bar fabricated from steel angle. (Tubular bottom seal optional.)

2.04 GUIDES: Guides fabricated from three minimum 3/16 inch structural steel angles, bolted together to form guide channel and wall mounting angle.

2.05 HEADPLATES: Headplates for mounting the curtain, hood, and barrel assemblies fabricated from minimum 1/4 inch steel plate. Drive axle provided with precision, greaseable, sealed ball bearings in cast iron housing.

2.06 BARREL: Barrel constructed from minimum 4-1/2 inch O.D. steel pipe. Deflection under full load not to exceed 0.03 inches per foot of span. Barrel provided with threaded rings or lugs welded to barrel assembly for curtain attachment.

2.07 SPRINGS: Spring, (tension) assembly supported within barrel by precision bearings. Curtain weight counterbalanced by oil-tempered, helically wound torsion springs, grease packed and mounted to steel torsion shaft with cast spring plugs. Spring assembly designed for 20,000 cycle life standard. (Higher cycles optional.)

2.08 HOOD: Half-hex hood formed of minimum 24-gauge steel sheet, shaped to fit within headplates. Intermediate hood support(s) furnished as required.

2.09 LOCKING: Chain hoist operated doors provided with chain keeper having provisions for padlocking. Plated slide locks optional.

2.10 OPERATION: Gear reduced chain hoist operation standard. Motor operation or manual push-up operation is optional. Manual push-up operation does not include simple test feature.

2.11 AUTOMATIC CLOSURE: 165-degree fusible links provided as standard. Closing speed regulated by centrifugal or viscous governor. Drop speed to be between 6" and 24" per second per NFPA-80.

2.12 OPERATION: Manual push-up, (without simple test feature), chain hoist or electric motor.

2.13 DROP TESTING: Floor level release and reset handle. Drop test activated by raising release handle. Reset assembly by securing the release handle to original starting position. No ladders or tools shall be needed to drop test or reset door. Manual push-up door drop tested by partial tension release and requires reset by a qualified door technician.

2.14 FINISHES: Curtain slats and hood hot-dipped galvanized, per ASTM A-653, G-90, with baked epoxy primer and polyester finish coat in solid gray, gray and white or tan and white. Guides and headplates shop painted black. Powder-coating optional. Bottom bars to be shop painted or galvanized.

PART 3 - EXECUTION

3.01 EXAMINATION:

- a. Examine site and notify architect of non-specified conditions or construction.
- b. Advise procedures and corrections necessary to accommodate installation.

3.02 INSTALLATION: C.H.I. rolling steel doors shall be installed and adjusted according to C.H.I. assembly instructions by trained door systems technicians.

3.03 CLEANING AND PRESENTATION:



- a. Clean all finished surfaces after installation for a factory original appearance.
- b. Replace any damaged components before final inspection.
- c. Remove all packaging and debris from installation area at the completion of installation.

3.04 DROP TESTING:

- a. Upon installation, door shall be drop tested before appropriate witnesses to attest to successful drop operation and reset.
- b. Complete the Rolling Fire Door Inspection and Drop Test form that accompanies each door.
- c. Present operation and maintenance instructions to owner after demonstration, drop test and reset is witnessed.

3.05 SCHEDULED TESTING: NFPA-80 and model code groups mandate annual inspection and drop testing of fire doors to check for proper operation and full closure.




GUARDIAN™ CHAINHOISTER HEADER CLEARANCES & DIMENSIONS (INCHES)

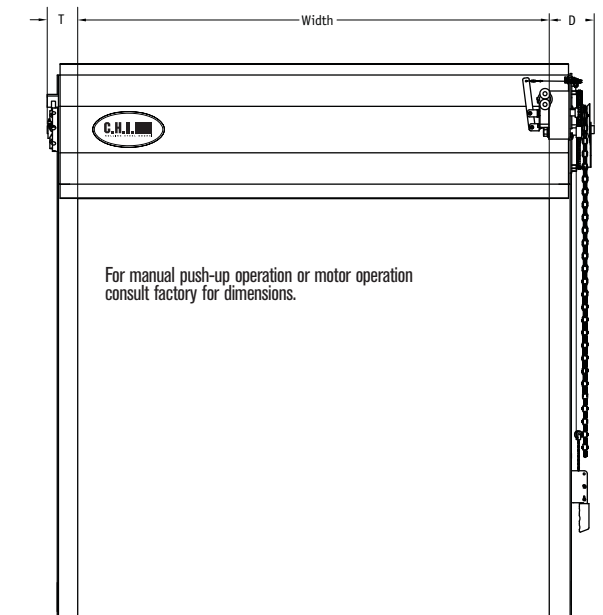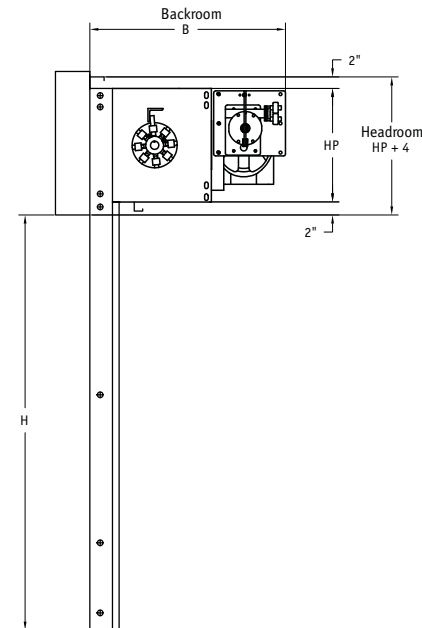

DETAILS

CLEARANCES & DIMENSIONS


1. Steel
2. Wood or Masonry
3. Wood, Masonry or Steel



NOTE: Grifco Governor requires 12" of backroom.

*When using Area Charts, if size falls on a zone division line, go up to the next zone.

AREA CHART* Series 7000 Guardian™ Fire Doors

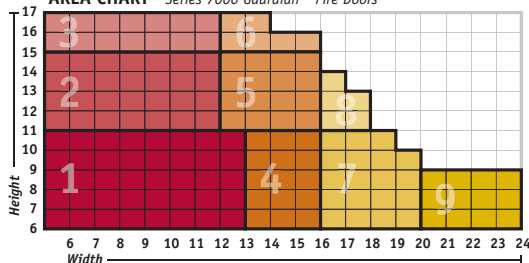


3 and 4-HOUR FIRE DOORS

zone	H	B	T	D	X	Y	Z
1	15"	28"	6-1/2"	7-1/2"	3-7/8"	4-3/8"	6-1/2"
2	17"	30"	6-1/2"	7-1/2"	3-7/8"	4-3/8"	6-1/2"
3	19"	32"	6-1/2"	7-1/2"	5"	4-3/8"	6-1/2"
4	15"	28"	7"	8"	4-1/4"	4-3/4"	7"
5	17"	30"	7"	8"	4-1/4"	4-3/4"	7"
6	19"	32"	7"	8"	5"	4-3/4"	7"
7	15"	28"	7-1/2"	8-1/2"	5"	5-1/4"	7-1/2"
8	17"	30"	7-1/2"	8-1/2"	5"	5-1/4"	7-1/2"
9	19"	32"	7-1/2"	8-1/2"	5"	5-1/4"	7-1/2"

Consult factory if headroom is critical or for sizes not listed.

SERIES 7500


Fire Shutter

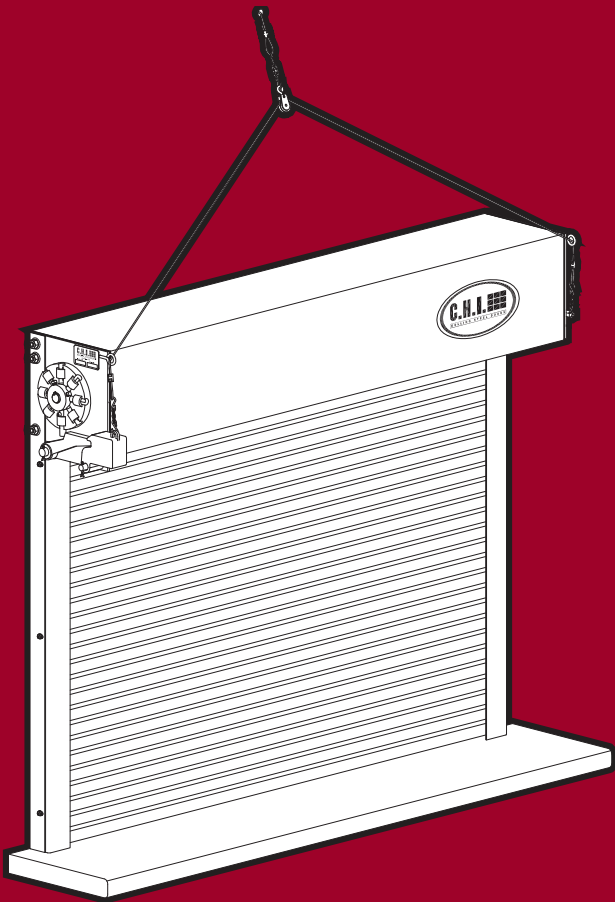

Fire protection manufactured to the highest standards, C.H.I. fire shutters feature attractive, space-saving designs and user-friendly operation.

U.L. labeled for installation to approved sheetrock, masonry and steel construction, Series 7500 Fire Shutters meet all U.L. requirements for counter and window openings.

- 45-minute, 90-minute and 3-hour U.L. labels with full compliance to NFPA-80 standards.
- Standard curtain features 1-1/2" pre-painted, hot-dipped galvanized steel slats.
- Optional stainless steel curtain and guides available in a #4 finish.
- Shop painted guides in a medium gloss black matches well with many powder-coat options.
- Reliable viscous governor provides smooth, quiet drop testing.
- Easily drop tested and reset with a minimum of downtime to assure operational readiness.
- Designed for face of wall mount and between-jamb mounting configurations.
- Manual push-up operation is standard. Gear reduced awning crank operation is optional.
- Bottom bar slide bolt locks are standard with cylinder locking optional.
- 165-degree fusible links are provided as standard detection/release devices.
- May be installed with all approved detection and release devices.
- Attractive, compact hood is designed for maximum efficiency in tight areas.

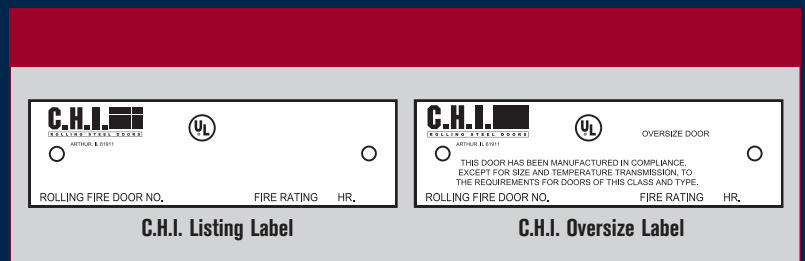

SPECIFICATIONS

PART 1 - GENERAL

1.01 WORK INCLUDED: Rolling shutters to be C.H.I. Fire Shutter Series 7500 and comply with Underwriter's Laboratories requirements for 3, 1-1/2 and 3/4-hour locations.

1.02 RELATED SECTIONS:

- a. Section 04200 Concrete Block
- b. Section 05500 Metal Fabrications
- c. Section 06100 Wall Construction
- d. Section 08300 Access Doors
- e. Section 09900 Painting
- f. Section 16000 Electrical

1.03 SUBMITTALS:

- a. Furnish all submittals according to guidelines of Section 01300 Submittal Procedures.
- b. Shop Drawings: Furnish shop drawings for architectural approval including elevations and details showing dimensions, finishes, profiles and sections for each door.
- c. Product Literature: Submit manufacturer's brochures and literature describing product to be used.
- d. Provide manufacturer's installation instructions.

1.04 DELIVERY, STORAGE AND HANDLING:

- a. Refer to Division 1 Material Storage and Handling Requirements.
- b. Deliver and store all materials in manufacturer provided packaging and protect from damage in a safe and dry location.

1.05 WARRANTY: Provide manufacturer's standard five-year warranty from date of plant shipment against defects in materials and workmanship. Manufacturer's brochures and literature describing product to be used.

PART 2 - PRODUCTS

2.01 GENERAL: Items and components described in the following paragraphs reflect current products manufactured by C.H.I. Overhead Doors, Inc, P.O. Box 260, Arthur, Illinois, 61911, and may be changed without notice by the manufacturer without penalty or liability.

2.02 CURTAIN: Interlocking curtain slats of roll-formed 22-gauge steel. Lateral slat movement and curtain wear controlled by galvanized, malleable cast iron endlocks fastened to every other slat. Windlocks added as dictated by windload requirements. Lateral slat movement and curtain wear controlled by malleable cast iron endlocks fastened to every other slat. Flat slat profile is 1-1/2 inches high by 1/2 inch deep.

2.03 BOTTOM BAR: Bottom bar steel or stainless steel angle, bolted to curtain.

2.04 GUIDES: Box shaped guides fabricated from 11-gauge steel or stainless steel with integral bellmouths and curtain stops.

2.05 HEADPLATES: Headplates for mounting curtain, hood, and barrel assemblies fabricated from minimum 1/4 inch steel plate. Drive axle provided with precision, self-aligning bearings.

2.06 BARREL: Barrel constructed from minimum 4-1/2 inch O.D. steel pipe. Deflection under full load not to exceed 0.03 inches per foot of span. Barrel provided with threaded rings or lugs welded to barrel assembly for curtain attachment.

2.07 SPRINGS: Spring (tension) end of barrel assembly fabricated with self-aligning ball bearing assembly to support barrel assembly. Curtain weight counterbalanced with oil-tempered, helically wound torsion springs, grease packed and mounted on steel torsion shaft.

2.08 HOOD: Rectangular hood formed of minimum 24-gauge steel sheet, shaped to fit within headplates. Intermediate hood support(s) furnished as required.

2.09 LOCKING: Manual push up shutters furnished with interior slide bolt locks suitable for padlocking. Awning crank operated shutters supplied without locks unless specified.

2.10 OPERATION: Manual push up operation is standard through ten feet wide. Awning crank operation available for all sizes.

2.11 AUTOMATIC CLOSURE: Thermally activated by 165-degree fusible link, or optional time delay releases. Closing speed regulated by viscous governor to between 6 inches and 24 inches per second, per NFPA-80 standards.

2.12 FINISHES: Steel curtain slats and hood hot-dipped galvanized, per ASTM A-653, G-90, with baked epoxy primer and polyester finish coat in gray and white. Guides and headplates shop painted medium gloss black. #4 stainless curtain, guides, bottom bar and hood optional. Powder-coating optional. Bottom bars to be shop painted steel, stainless steel, galvanized or powder-coated.

PART 3 - EXECUTION

3.01 EXAMINATION:

- a. Examine site and notify architect of non-specified conditions or construction.
- b. Advise procedures and corrections necessary to accommodate installation.

3.02 INSTALLATION: C.H.I. rolling fire shutters shall be installed and adjusted according to C.H.I. assembly instructions by trained door systems technicians.

3.03 CLEANING AND PRESENTATION:



- a. Clean all finished surfaces after installation for a factory original appearance.
- b. Replace any damaged components before final inspection.
- c. Remove all packaging and debris from installation area at the completion of installation.

3.04 DROP TESTING:


- a. Upon installation, door shall be drop tested before appropriate witnesses to attest to successful drop operation and reset.
- b. Complete the Rolling Fire Door Inspection and Drop Test form that accompanies each door.
- c. Present operation and maintenance instructions to owner after demonstrations, drop tests and reset is witnessed.

3.05 SCHEDULED TESTING: NFPA-80 and model code groups mandate annual inspection and drop testing of fire doors to check for proper operation and full closure.

HEADER CLEARANCES & DIMENSIONS (INCHES)

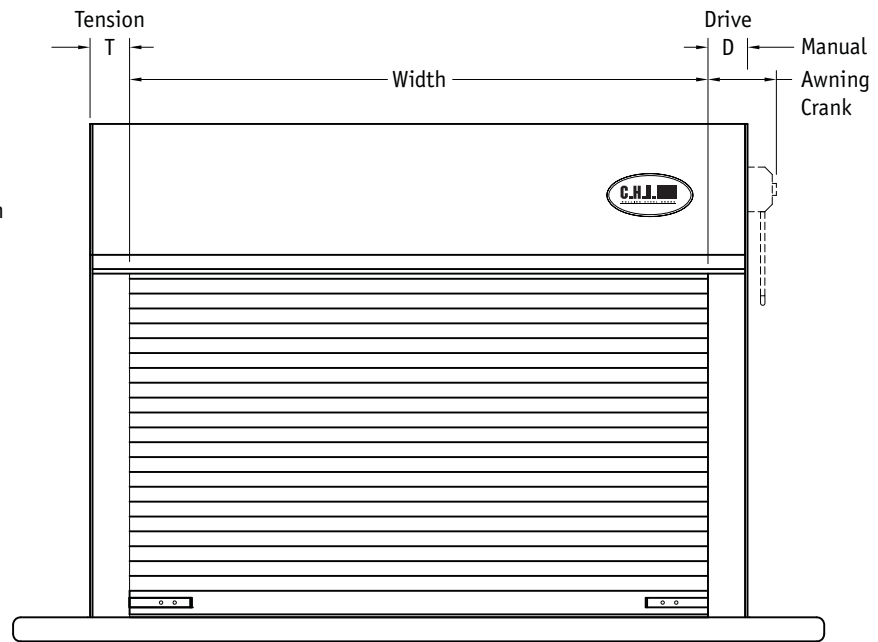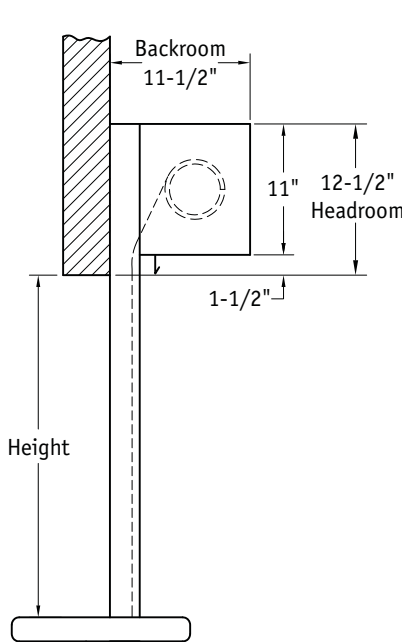


Face of Wall Mount



	D	T
Manual	5-1/2"	6-1/2"
Awning Crank	7-1/2"	6-1/2"

Between Jamb Mount



	D	T
Manual	5-1/2"	6-1/2"
Awning Crank	7-1/2"	6-1/2"

SERIES 6500

Counter Shutter



Security and beauty blended with smooth, quiet and effortless operation, the C.H.I. Series 6500 counter shutter is a wonderfully refined, architecturally pleasing enclosure.

FEATURES:

- The Model 6544 features a clear anodized, extruded aluminum curtain and guides.
- The Model 6522 features a painted steel curtain with clear anodized, extruded aluminum guides.
- The Model 6566 features a stainless steel curtain with a #4 finish and stainless steel "J" guides.
- Blemish-free exterior: The Models 6544 and 6522 feature hidden headplates, guides and wall fasteners for a well-blended, architecturally sensitive appearance.
- Visible seams and shadow lines are eliminated from extruded aluminum guides due to unique joint designs.
- Soft brush guide runners silence curtain operation and seal out dust and noise.
- Dual-bottom bar seal assures a soft, non-marring touch down to valuable counter tops.
- Thumb turn locks are spring assisted, and secure each side of the bottom bar into hidden recesses in the guides. Cylinder locking is optional for each side.
- Integral lift rails on the bottom bar provide full-width manual access and simplified lifting.
- Invisible tubular motor operation, awning crank operation, or exterior mount motor is optional.
- Compact in design, the Series 6500 installs into minimum head and side room dimensions.

Optional high torque tubular motor for non-visible, dependable operation.

SPECIFICATIONS

PART 1 - GENERAL

1.01 WORK INCLUDED: Rolling counter shutters to be C.H.I. Series 6500.

1.02 RELATED SECTIONS:

- a. Section 04200 Concrete Block
- b. Section 05500 Metal Fabrications
- c. Section 06100 Wall Construction
- d. Section 08300 Access Doors
- e. Section 09900 Painting
- f. Section 16000 Electrical

1.03 SUBMITTALS:

- a. Furnish all submittals according to guidelines of Division 1 Submittal Procedures.
- b. Shop Drawings: Furnish shop drawings for architectural approval including elevations and details showing dimensions, finishes, profiles and sections for each door.
- c. Product Literature: Submit manufacturer's brochures and literature describing product to be used.
- d. Provide manufacturer's installation instructions.

1.04 DELIVERY, STORAGE AND HANDLING:

- a. Refer to Division 1 Material Storage and Handling Requirements.
- b. Deliver and store all materials in manufacturer provided packaging and protect from damage in a safe and dry location.

1.05 WARRANTY: Provide manufacturer's standard five-year warranty from date of plant shipment against defects in materials and workmanship.

PART 2 - PRODUCTS

2.01 GENERAL: Items and components described in the following paragraphs reflect current products manufactured by C.H.I. Overhead Doors, Inc., P.O. Box 260, Arthur, Illinois, 61911, and may be changed without notice by the manufacturer without penalty or liability.

2.02 CURTAIN: Extruded, interlocking aluminum slats, interlocking roll-formed slats in 22-gauge steel, or interlocking roll-formed slats in 22-gauge stainless steel. Lateral slat movement and curtain wear controlled by nylon endlocks fastened to every other slat. Windlocks added as dictated by shutter size and windload requirements. Slat profile is 1-1/2 inches high by 1/2 inch deep.

2.03 BOTTOM BAR: Extruded aluminum with integral lift rails and dual bottom astragal standard for aluminum and steel curtains. Stainless steel angle with bottom astragal provided for stainless curtains.

2.04 GUIDES: Extruded, clear anodized aluminum. Box shaped, two-piece configuration with soft brush guide runners, bell mouths and travel stops. Guides for stainless steel are box shaped, #4 stainless steel with integral bell mouths and curtain stops.

2.05 HEADPLATES: Headplates for mounting curtain, hood, and barrel assemblies fabricated from steel plate. Drive axle supported by precision, self-aligning bearings.

2.06 BARREL: Barrel constructed from minimum 4-1/2 inch O.D. steel pipe. Deflection under full load not to exceed 0.03 inches per foot of span. Barrel provided with threaded rings or lugs welded to barrel assembly for curtain attachment.

2.07 SPRINGS: Spring (tension) end of barrel assembly fabricated with self-aligning ball bearing assembly to support barrel assembly. Curtain weight counterbalanced by oil-tempered, helically wound torsion springs, grease packed and mounted on steel torsion shaft.

2.08 HOOD: Rectangular hood formed of minimum 24-gauge steel, aluminum or stainless steel sheet, shaped to fit within headplates. Intermediate hood support(s) furnished as required.

2.09 LOCKING: Manual push-up doors furnished with thumb turn locks. Stainless steel slide locks provided with stainless curtains. Keyed thumb turn and cylinder locking optional.

2.10 OPERATION: Manual push up. Reduced drive awning crank operation, concealed tube motor operation and outside motor operation optional.

2.11 FINISHES: Extruded aluminum curtain, guides and bottom bar to be clear anodized. Steel curtain slats and hood hot-dipped galvanized, per ASTM A-653, G-90, with baked epoxy primer and polyester finish coat in gray and white. Painted curtains furnished with clear anodized extruded aluminum box guides and bottom bar. Stainless shutters furnished with #4 polished finish curtain, guides and bottom bar. Powder-coating optional for all steel and aluminum components.

PART 3 - EXECUTION

3.01 EXAMINATION:


- a. Examine site and notify architect of non-specified conditions or construction.
- b. Advise procedures and corrections necessary to accommodate installation.

3.02 INSTALLATION: C.H.I. rolling steel doors shall be installed and adjusted according to C.H.I. assembly instructions by trained door systems technicians.


3.03 CLEANING AND PRESENTATION:

- a. Clean all finished surfaces after installation for a factory original appearance.
- b. Replace any damaged components before final inspection.
- c. Remove all packaging and debris from installation area at the completion of installation.
- d. Present operation and maintenance instructions to owner after demonstrating proper care and operation of door.

HEADER CLEARANCES & DIMENSIONS (INCHES)

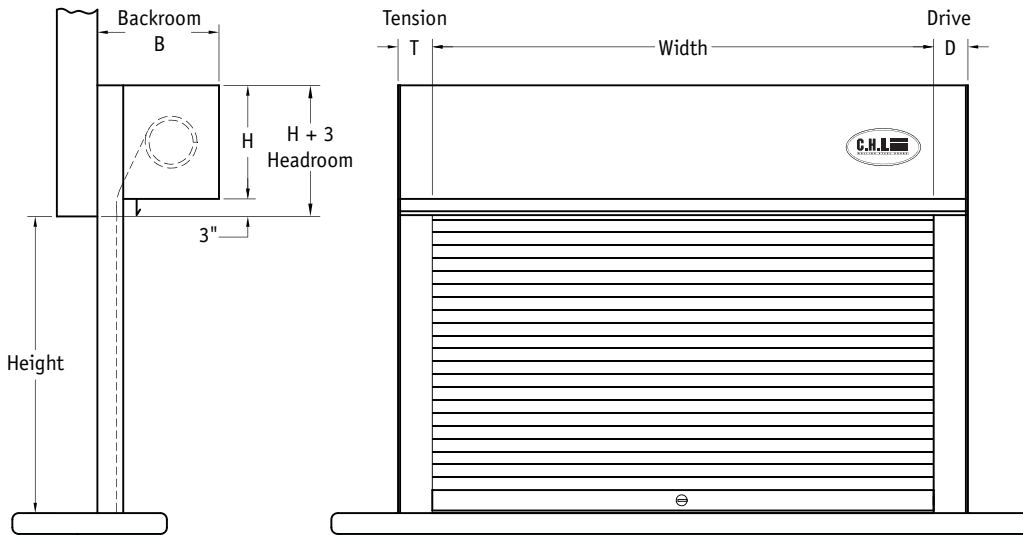


AREA CHART* Series 6500 Counter Shutters

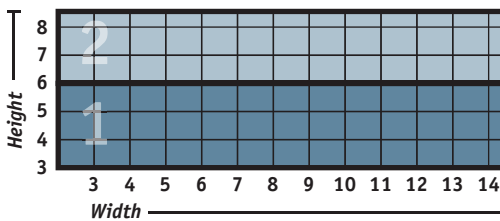


zone	H	B
1	10"	10-1/2"
2	11"	11-1/2"

Face of Wall Mount
Aluminum & Steel




	D	T
Manual	2-1/2"	2-1/2"
Awning Crank	4-1/2"	2-1/2"
Motor	2-1/2"	2-1/2"

Between Jamb Mount
Aluminum & Steel




	D	T
Manual	2-1/4"	2-1/4"
Awning Crank	4-1/4"	2-1/4"
Motor	4-1/4"	2-1/4"

Face of Wall Mount
Stainless Steel



	D	T
Manual	3-1/2"	3-1/2"
Awning Crank	5-1/2"	3-1/2"
Motor	5-1/2"	3-1/2"

Between Jamb Mount
Stainless Steel



	D	T
Manual	4-1/2"	4-1/2"
Awning Crank	6-1/2"	4-1/2"
Motor	6-1/2"	4-1/2"

Consult factory if headroom is critical or for sizes not listed.

MOTOR OPERATION

for Rolling Steel Doors & Shutters


DOOR SELECTION PROCEDURE

- Refer to the motor operator area chart below to select operator type based on door dimensions and gauge.
- You may choose between wall mount or front of headplate mount in the charts below to determine headroom, sideroom and backroom clearance requirements.
- Operator mounting brackets are available for front of headplate mount.
- Front of headplate and wall mount operator covers area available for exterior mount doors.

All motor operators are U.L. listed and feature integrated chain hoist, emergency disconnect and a solenoid actuated brake as standard. The standard control is a three-button station (open, close, stop) in a NEMA-1 electrical box. An external radio control terminal is standard for convenient connection. Other controls, timers, safety edges, and sensing devices are available as options.

INERTIA BRAKES

Inertia brakes are available for Series 6000 industrial service doors. Located on the drive shaft, these brakes sense a sudden increase in rpm and apply immediate braking to prevent curtain free-fall.

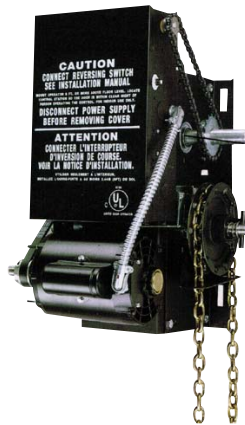

MODEL H

Heavy-duty for moderate-sized rolling doors using heavy-duty V-belt and chain drive reduction. Available from 1/2 H.P. to 3/4 H.P. single-phase and three-phase operation.



MODEL GH


For larger doors and heaviest use, high-starting torque 40:1 drive reduction using heavy-duty gears running in an oil bath. Available in a variety of horsepower and voltage requirements in single or three-phase operation.

TUBULAR MOTORS

U.L. rated shutter motors address a broad range of torque requirements with various horsepower, voltage and phase options to cover virtually any shutter application. Our space conscious tube motors require only 1-1/2 inches of additional side room and feature a standard five-year warranty.




WALL MOUNT



Motor	Sideroom	Backroom
H	21-1/2"	18"
GH	21-1/2"	14-1/2"

FRONT HEADPLATE MOUNT

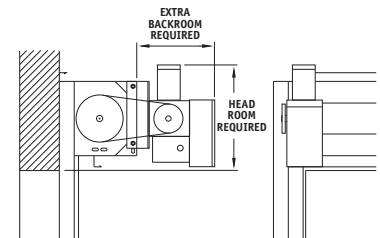

Motor	Extra Backroom	Headroom
H	20-1/2"	23"
GH	17"	30"

HORSEPOWER SELECTION CHART (MAX SQ. FT.)

HP	Type	22 Gauge	20/18 Gauge	Insulated
1/2	H	144	130	120
	GH	144	130	120
3/4	H	200	180	168
	GH	240	200	180
1	GH	400	360	320
1-1/2	GH	540	480	440


FINISHES

for Rolling Steel Doors and Shutters

C.H.I. coiling doors are available in a wide variety of choices and finished with a unique paint coat standard that offers a tan or gray exterior with a white interior; colors may be reversed if desired. A white curtain and hood color on the interior provides a bright, reflective workplace enclosure. Solid gray is also standard. Guides are shop primed in medium gloss black.

The raw steel is treated with a hot-dipped galvanized coating, followed by a baked-on enamel primer coat and a polyester finish coat. This process becomes the base to which powder-coat is applied.

Select powder-coat options from a palette of 188 colors. RAL numbers are provided for each color to ensure that your selection is consistent and right on target the first time.

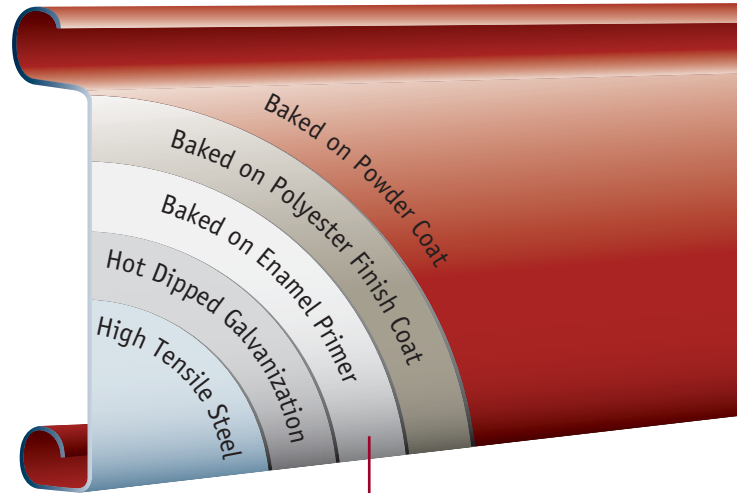

Progressive slat coating process

SERIES COMPARISON

OPTIONS	DOORS/SERIES				
	6000	6241	6500	7000	7500
Pre-finished Galvanized Steel	•	•	•	•	•
Stainless Steel Curtain and Guides			•		•
Clear Anodized Aluminum Curtain			•		
Powder Coat Availability	•	•	•	•	•
Curved Slat Profile	•			•	
Flat Slat Profile	•	•	•	•	•
Extended Cycle Life Options	•	•	•	•	•
Continuous Duty Springless with Inertia Brake	•	•			
Vision Lite Options	•	•		•	
Three Angle Structural Guides	•	•		•	
Manual Operation	•	•	•	•	•
Awning Crank Operation			•		•
Chain Hoist Operation	•	•		•	
Motor Operation	•	•	•	•	•
Two Wire Electric Safety Edge	•	•	•	•	•
Four Wire Self-Monitoring Safety Edge	•	•	•	•	•
Fail Safe Motor Operation				•	•
Formed Box Shaped Guides			•		•
Perforated Curtain	•				

LIMITED WARRANTY

C.H.I. Overhead Doors, Inc. ("C.H.I.") warrants rolling steel doors, shutters and components to be free from defects in materials and workmanship for a period of five (5) years. Model 6241 service doors are warranted for one (1) year. Spring wire is warranted for one year. All warranty periods begin with the date of manufacture. C.H.I.'s obligations are strictly limited to repair or replacement of defective parts and components during the warranty period.

This limited warranty excludes: (1) rust caused by damages or scratching; (2) damage resulting from exposure to corrosive chemicals, corrosive fumes, condensation, water or fire; (3) damages caused by accident, improper use, negligent operation, improper installation, improper maintenance or normal wear; (4) shipping, installation or labor charges; (5) defects in paints or coatings used to finish door sections; (6) any product or component which is modified, altered, or not part of the original door, and (7) damages resulting from any circumstances beyond the direct control of C.H.I.

In the event of a defective component, contact the dealer the door was purchased from within fifteen (15) days from discovery of the defect. C.H.I. reserves the right to inspect all products alleged to be defective and to verify eligibility of this limited warranty.

THIS LIMITED WARRANTY EXCLUDES ANY LOSS OR DAMAGE NOT SPECIFICALLY UNDERTAKEN HEREIN, INCLUDING, WITHOUT LIMITATION, ANY CONSEQUENTIAL OR INCIDENTAL DAMAGES, SUCH AS DEATH, INJURY, DAMAGES TO PROPERTY, OR DAMAGES ARISING FROM LOSS OF USE OF ANY PRODUCT OR FACILITY. ALL OTHER WARRANTIES, EXPRESSED OR IMPLIED, INCLUDING ANY WARRANTIES OF FITNESS FOR A PARTICULAR PURPOSE AND OF MERCHANTABILITY, ARE HEREBY EXPRESSLY EXCLUDED.

This warranty is non-transferable.



PLEASE VISIT OUR WEBSITE AT WWW.CHIOHD.COM TO SEE OUR ENTIRE LINE OF SECTIONAL AND ROLLING STEEL DOORS.

VISIT YOUR DOOR PROFESSIONAL AT:

C.H.I. Overhead Doors are manufactured in Arthur, Illinois, USA.

